
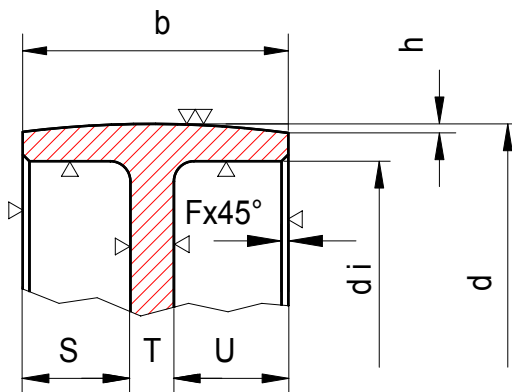


Taper-Flachriemenscheiben ohne Bund

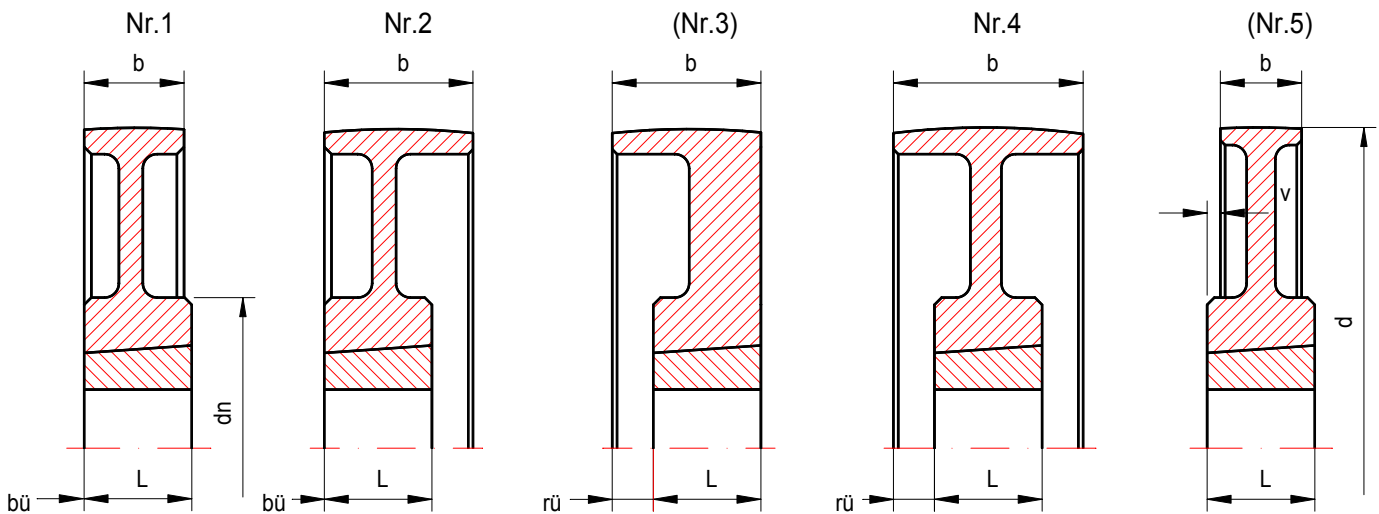

Bezeichnungen:

- b = Kranzbreite
- l = Nabellänge
- L = Lage zum Kranz
- bü = bündig
- rü = Rücksprung
- v = Vorsprung

Ausführung:

- = Vollscheibe
- = Bodenscheibe
(mit o. ohne Spiegel)

Material: Guss

b = 32

d	Buchse	Nabe				S	T	U	Gewicht kg
		Länge	Lage	Bild	Typ				
63	1108	23	bü	2	●	0	23	9	0,40
67	1108	23	bü	2	●	0	23	9	0,45
71	1210	26	bü	2	●	0	26	6	0,52
75	1210	26	bü	2	●	0	26	6	0,61
80	1210	26	bü	2	●	0	26	6	0,70
85	1210	26	bü	2	●	0	26	6	0,78
90	1610	26	bü	2	●	0	26	6	0,80
95	1610	26	bü	2	●	0	26	6	0,96
100	1610	26	bü	2	●	0	26	6	1,04
106	1610	26	bü	2	●	0	26	6	1,18
112	1610	32	bü	2	●	0	26	6	1,30
118	1610	26	bü	2	●	0	26	6	1,60
125	1610	26	bü	2	●	0	26	6	1,66
132	2012	32	bü	2	●	0	26	6	2,06
140	2012	32	bü	2	●	0	32	0	1,90
150	2012	32	bü	2	o	10	12	10	3,00
160	2012	32	bü	2	o	8	14	10	3,50
180	2012	32	bü	2	o	12	8	12	3,80
190	2517	45	bü	2	o	12	8	12	4,15
200	2517	45	bü	1	o	12	8	12	4,32
212	2517	45	bü	1	o	12	8	12	4,70
224	2517	45	bü	1	o	12	8	12	4,90
236	2517	45	bü	1	o	12	8	12	5,40
250	2517	45	bü	1	o	12	8	12	5,60
265	2517	45	bü	1	o	9	14	9	5,90
280	2517	45	bü	1	o	13	9	10	6,20
315	2517	45	bü	1	o	11	12	8	7,60
355	2517	45	bü	1	o	10	12	10	11,10
400	2517	45	bü	1	o	8	16	8	14,60
450	2517	45	bü	1	o	9	14	9	16,20
500	3020	52	bü	1	o	10	10	12	14,00
630	3020	52	bü	1	o	10	10	12	17,00

b = 50

d	Buchse	Nabe				S	T	U	Gewicht kg
		Länge	Lage	Bild	Typ				
63	1108	23	bü	2	●	0	23	27	0,45
80	1210	26	bü	2	●	0	26	24	0,90
85	1210	26	bü	2	●	0	26	24	1,20
90	1610	26	bü	2	●	0	26	24	1,60
95	1610	26	bü	2	●	0	26	24	1,60
100	1610	26	bü	2	●	0	26	24	1,60
106	1610	26	bü	2	●	0	26	24	1,80
112	2012	32	bü	2	●	0	32	18	1,82
118	2012	32	bü	2	●	0	32	18	1,88
125	2012	32	bü	2	●	0	32	18	2,60
132	2012	32	bü	2	●	0	32	18	2,80
140	2012	32	bü	2	●	0	32	18	3,20
150	2012	32	bü	2	●	0	32	18	3,60
160	2012	32	bü	2	o	10	25	15	4,12
170	2517	45	bü	2	o	10	25	15	4,60
180	2517	45	bü	2	o	10	25	15	5,00
190	2517	45	bü	2	o	10	25	15	5,50
200	2517	45	bü	2	o	20	10	20	6,30
212	2517	45	bü	2	o	20	10	20	5,50
212	2517	45	bü	2	o	20	10	20	6,50
224	2517	45	bü	2	o	20	10	20	7,00
236	2517	45	bü	2	o	20	10	20	7,25
250	2517	45	bü	2	o	20	10	20	7,50
280	2517	45	bü	2	o	20	10	20	8,50
300	3020	45	bü	2	o	19	12	19	10,00
315	3020	52	bü	1	o	18	14	18	11,20
355	3020	52	bü	1	o	19	14	17	12,80
400	3020	52	bü	1	o	19	14	17	17,20
450	3020	52	bü	1	o	17	18	15	16,00
500	3535	89	bü	5	o	17	18	15	17,20
560	3535	89	bü	5	o	17	18	15	18,10
630	3535	89	bü	5	o	17	18	15	19,20

b = 80

d	Buchse	Nabe		Bild	Typ				Gewicht kg
		Länge	Lage			S	T	U	
80	1615	38	bü	2	●	0	38	21	1,50
90	1615	38	bü	2	●	0	38	42	1,90
100	1615	38	bü	2	●	0	38	42	2,40
125	2517	45	bü	2	●	0	45	35	3,40
132	2517	45	bü	2	●	0	45	35	3,90
140	2517	45	bü	2	●	0	45	35	4,16
150	2517	45	bü	2	●	0	45	35	5,00
160	2517	45	bü	2	●	0	45	35	5,90
170	2517	45	bü	2	●	0	45	35	7,10
180	2517	45	bü	2	●	30	10	40	8,50
190	2517	45	bü	2	○	30	10	40	9,50
200	2517	45	bü	2	○	30	10	40	6,00
212	3020	52	bü	2	○	30	15	35	11,80
224	3020	52	bü	2	○	30	15	35	10,80
236	3020	52	bü	2	○	30	15	35	11,80
250	3020	52	bü	2	○	34	12	34	12,80
280	3020	52	bü	2	○	34	12	34	13,80
300	3020	52	bü	2	○	34	12	34	18,00
315	3020	52	bü	2	○	34	12	34	19,60
355	3030	77	bü	2	○	34	12	34	17,40
400	3535	89	bü	1	○	33	14	33	24,30
450	3535	89	bü	1	○	33	14	33	28,40
500	4040	102	bü	1	○	33	14	33	43,00
560	4040	102	bü	1	○	33	14	33	46,40
630	4545	114	v17	1	○	33	14	33	62,00

b = 100

d	Buchse	Nabe		Bild	Typ				Gewicht kg
		Länge	Lage			S	T	U	
90	1615	38	rü 31	4	●	40	38	22	2,20
100	1615	38	rü 31	4	●	31	39	30	2,70
125	2517	45	rü 27	4	●	27	45	28	3,80
140	3020	52	bü	2	●	0	52	48	4,90
150	3020	52	bü	2	●	0	52	48	6,20
160	3020	52	bü	2	●	0	52	48	7,50
180	3020	52	bü	2	●	0	52	48	8,00
200	3020	52	bü	2	●	22	30	48	10,40
212	3020	52	bü	2	○	15	30	55	11,00
224	3020	52	bü	2	○	15	30	55	12,70
236	3020	52	bü	2	○	15	30	55	16,00
250	3020	52	bü	2	○	15	30	55	13,10
280	3020	52	bü	2	○	31	14	55	14,60
300	3020	52	bü	2	○	31	14	55	15,40
315	3020	52	bü	2	○	42	16	42	17,00
335	3020	52	bü	2	○	42	16	42	18,00
355	3535	52	bü	2	○	42	16	42	19,30
400	3535	89	bü	2	○	41	18	41	26,80
450	3535	89	bü	2	○	41	18	41	30,20
500	4040	102	bü	1	○	41	18	41	46,00
560	4040	102	bü	1	○	42	19	39	50,00
630	4545	114	bü	1	○	40	20	40	61,60

b = 125

d	Buchse	Nabe		Bild		S	T	U	Gewicht kg
		Länge	Lage	Bild	Typ				
125	2517	45	rü 40	4	•	40	45	40	4,50
140	3030	77	bü	2	•	0	77	48	5,20
150	3030	77	bü	2	•	0	77	48	6,70
160	3030	77	bü	2	•	0	77	48	8,50
180	3030	77	bü	2	•	20	55	50	12,00
200	3030	77	bü	2	o	30	40	55	15,50
224	3030	77	bü	2	o	34	35	56	14,20
236	3030	77	bü	2	o	34	35	56	22,20
250	3030	77	bü	2	o	34	35	56	17,50
265	3030	77	bü	2	o	34	35	56	32,60
280	3030	77	bü	2	o	55	14	56	17,50
300	3030	77	bü	2	o	55	14	56	18,20
315	3030	77	bü	2	o	55	14	56	19,00
335	3535	89	bü	2	o	54	16	55	21,40
355	3535	77	bü	2	o	54	16	55	22,00
400	3535	89	bü	2	o	54	16	55	29,00
450	3535	89	bü	2	o	54	16	55	33,00
500	4040	102	rü 12	4	o	54	16	55	45,00
560	4040	102	rü 12	4	o	54	16	55	54,00
630	4545	114	rü 5,5	4	o	54	16	55	72,00

b = 160

d	Buchse	Nabe		Bild		S	T	U	Gewicht kg
		Länge	Lage	Bild	Typ				
150	3030	77	bü	2	•	0	77	83	7,60
160	3030	77	bü	2	•	0	77	83	10,00
180	3030	77	bü	2	•	0	77	83	14,00
200	3030	77	bü	2	o	0	77	83	18,00
224	3030	77	bü	2	o	30	47	83	17,00
250	3030	77	bü	2	o	54	16	90	17,50
280	3535	89	bü	2	o	64	16	80	21,80
315	3535	89	bü	2	o	64	16	80	26,00
335	3535	89	bü	2	o	62	18	80	28,00
355	3535	89	bü	2	o	62	18	80	27,00
400	3535	89	bü	2	o	62	18	80	32,00
450	3535	89	bü	2	o	62	18	80	42,50
500	4040	102	rü 29	4	o	62	18	80	53,00
560	4040	102	rü 29	4	o	62	18	80	66,50
630	4545	114	rü 23	4	o	62	18	80	80,00

b = 200

d	Buchse	Nabe		Bild		S	T	U	Gewicht kg
		Länge	Lage	Bild	Typ				
280	4040	102	bü	2	o	90	20	90	29,00
315	4040	102	bü	2	o	90	20	90	33,00
355	3535	102	bü	2	o	90	20	90	36,00
400	4040	102	bü	2	o	90	20	90	41,00
450	4040	102	rü 50	4	o	90	20	90	55,00
500	4545	114	rü 43	4	o	90	20	90	69,00
560	4545	114	rü 43	4	o	90	25	85	87,00
630	5050	127	rü 36	4	o	90	25	85	105,00